




## CASHTRONIC® MVX 2-WAY pneumatic tube system

### Functions (shortly)

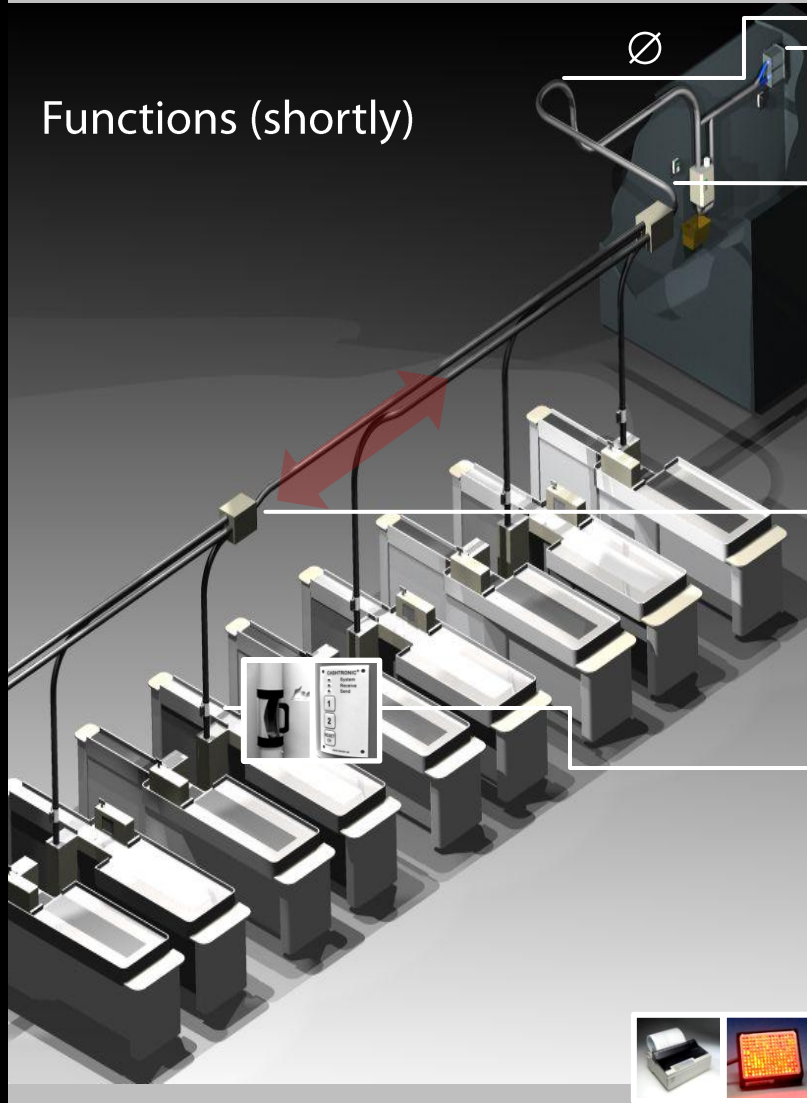

## Modern, user-friendly and secure Time and cost efficient

Tube diameter 63mm, 90mm, 110mm



Variety of 1-phase and 3-phase blowers: we propose service-friendly and cost-efficient solutions.



The system is controlled by Main Controlled Unit with operational panel and multi-language menu, which contains broadest on the market choice of settings.

The system is based on the latest electronic components (circuit boards, sensors, etc.) controlled by microprocessors.

An "intelligent" pneumatic tube system concept – the "brain" of Cashtronic®MVX has excellent upgrade and integration possibilities. 2-way Cashtronic®MVX can be even integrated with 1-way Cashtronic®MVX air control units, stations and panels.

The system is not only showing error messages on the display of the main control unit, but also proposes a possible error cause



2-, 3- and 4-way diverters ( = less diverters in the system, which means less tubes) with no transmission ( = lesser quantity of moving parts) and exact-positioning sensors.

Custom design of sub-stations according to client's wishes. Integrated or separate panels.

The system books sendings automatically and places all bookings in chronological line. Manual sending is also available.



Four access levels secure pneumatic tube system settings from unauthorized persons, which excludes errors in the system.



Additional options like log printer, receipt printer, signals and etc.



PNEUMATIC TUBE SYSTEMS

CASHTRONIC®MVX